
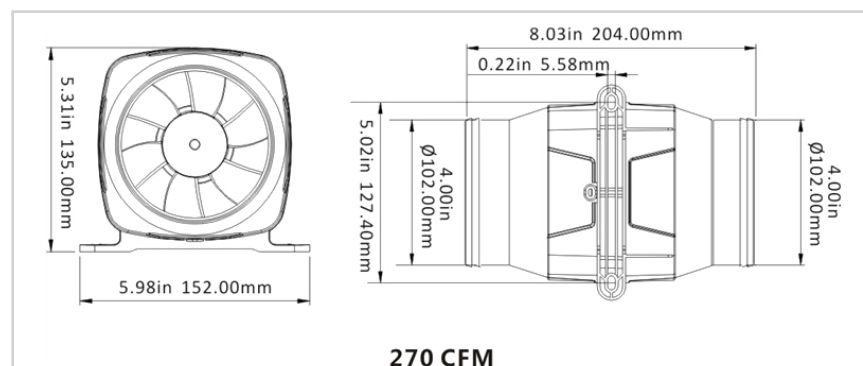


# Anti-corrosion High Speed Air Exchange Duct Fan

- Ventilation in bilge, engine compartment, kitchen and toilet
- Ventilation of bullet trains, buses, etc. (soot from engine room and bathroom)
- Sunlight sheds and building ventilation
- Main product performance:  
 Can be installed horizontally and vertically, Low current, large air volume, long life. 4 bladed impeller ensures high air volume  
 Moisture-proof, good sealing performance Anti-corrosion ABS plastic housing

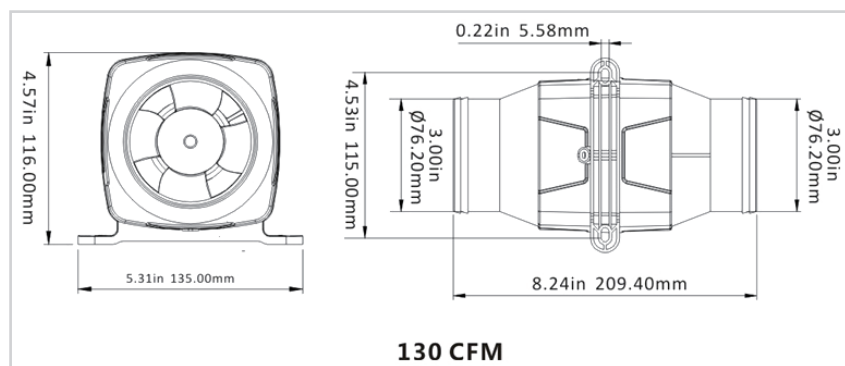

## Technical Parameters

| Model                | Voltage (v) | Air flow (m³/h) | Current (A) | Fuse wire (A) | Size   | Package size (mm) | N.W/G.W (kg) |
|----------------------|-------------|-----------------|-------------|---------------|--------|-------------------|--------------|
| LWDD-76(3")L-PWN-01  | 12          | 130/220         | 2.5         | 5             | 3"/76  | 215x137x120       | 0.45/0.60    |
| LWDD-76(3")M-PWN-02  | 24          | 130/220         | 1.3         | 3             | 3"/76  | 215x137x120       | 0.45/0.60    |
| LWDD-102(4")L-PWN-12 | 12          | 270/456         | 6           | 10            | 4"/102 | 207x154x114       | 0.70/0.90    |
| LWDD-102(4")M-PWN-13 | 24          | 270/456         | 3           | 5             | 4"/102 | 207x154x114       | 0.70/0.90    |