


## Industrial Axial Blower



- 100% pure copper wire motor
- Full metal body, for industrial use
- Strong air flow, various sizes for choose
- Optional for front grill and back grill

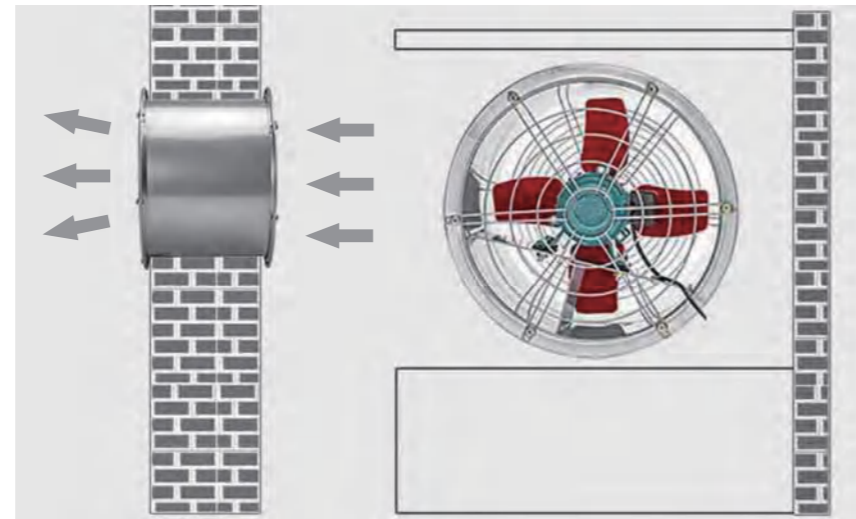


### Technical Parameters

Model	Voltage (v)	Frequency (Hz)	Power (W)	Air flow (m <sup>3</sup> /min)	Speed (RPM)	Package size (cm)
LWA-250(10")U(S)M-01	110~120 220~240	50/60	80	28	1350	32x27x32
LWA-300(12")U(S)M-01		50/60	100	35	1350	36x27x36
LWA-350(14")U(S)M-01		50/60	140	60	1350	42x27x42
LWA-400(16")U(S)M-01		50/60	170	90	1350	48x27x48
LWA-500(20")U(S)M-01		50/60	200	150	1350	57x27x57
LWA-600(24")U(S)M-01		50/60	500	205	1350	67x27x67

## Powerful Axial Blower




- 100% pure copper wire motor
- Full metal body, for industrial use
- Strong air flow, various sizes for choose
- Optional for front grill and back grill

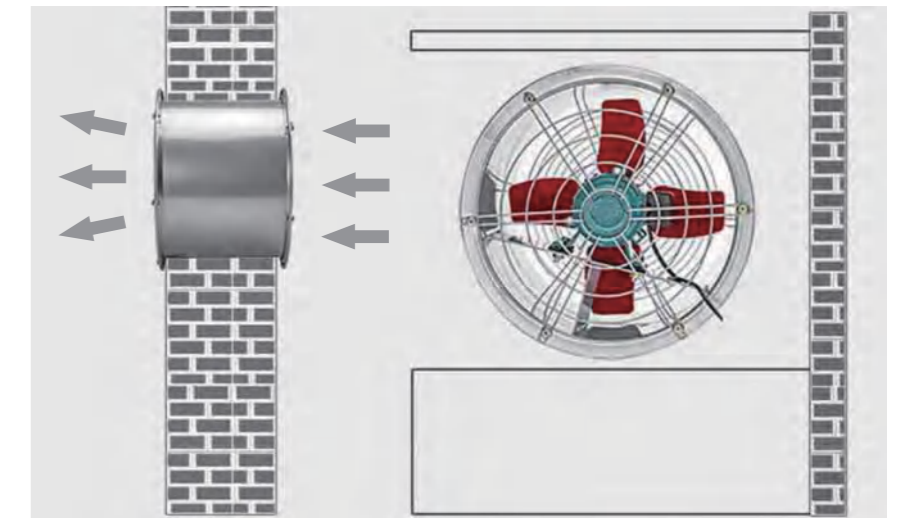

### Technical Parameters

Model	Voltage (v)	Frequency (Hz)	Power (W)	Air flow (m <sup>3</sup> /min)	Speed (RPM)	Package size (cm)
LWA-300(12")U(S)M-02	110~120 220~240	50/60	120	46	1350	36x28x36
LWA-350(14")U(S)M-02		50/60	160	65	1350	42x28x42
LWA-400(16")U(S)M-02		50/60	200	110	1350	48x28x48
LWA-500(20")U(S)M-02		50/60	250	165	1350	57x38x57
LWA-600(24")TM-02		380	50/60	800	310	1350

## Powerful Axial Blower

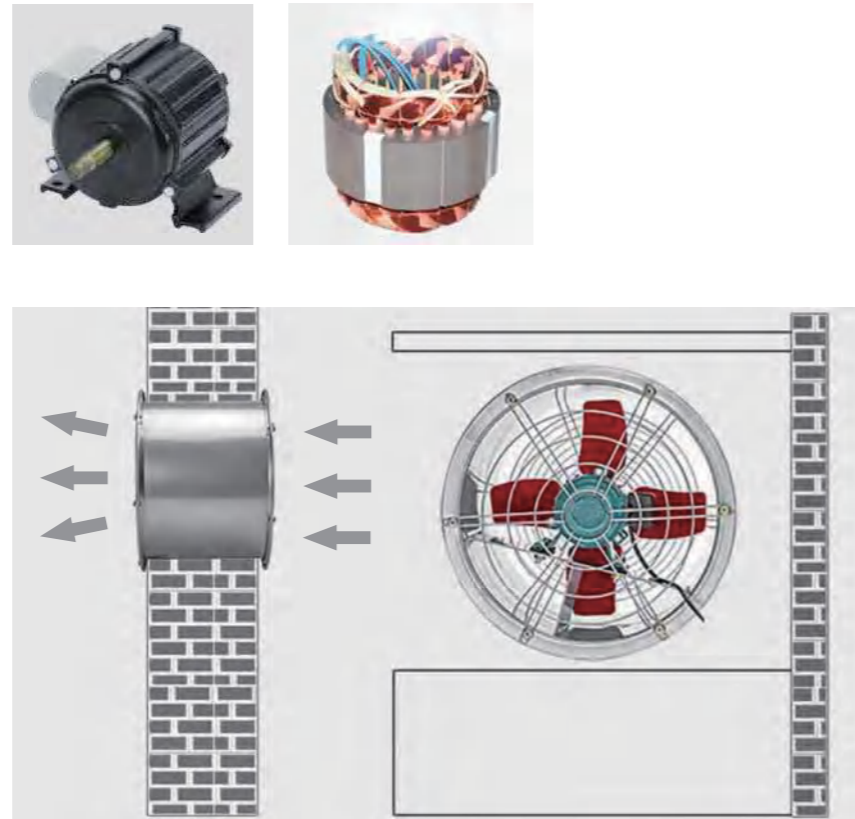

- 100% pure copper wire motor
- Full metal body, for industrial use
- High speed, strong air flow, various sizes for choose
- Optional for front and back grill

### Technical Parameters

Model	Voltage (v)	Frequency (Hz)	Power (W)	Air flow (m³/min)	Speed (RPM)	Package size (cm)
LWA-200(8")U(S)M-01	110~120 220~240	50/60	135	23	2800	27x29x27
LWA-250(10")U(S)M-02		50/60	230	48	2800	32x28x32
LWA-300(12")U(S)M-03		50/60	370	65	2800	37x28x37
LWA-350(14")U(S)M-03		50/60	550	98	2800	42x28x42
LWA-400(16")U(S)M-03		50/60	750	150	2800	48x28x48

## Portable Ventilator



- 100% pure copper wire motor
- Metal enclosure, metal fan blades
- High speed with strong airflow
- With front and back grill, with handle easy for moving

### Technical Parameters

Model	Voltage (v)	Frequency (Hz)	Power (W)	Air flow (m³/h)	Speed (RPM)	Air Pressure (Pa)	CFM
LWA-200(8")U(S)M-02	110~120 220~240	50/60	120	1300	2800	140	765
LWA-250(10")U(S)M-03		50/60	250	2100	2800	215	1235
LWA-300(12")U(S)M-04		50/60	370	3000	2800	230	1765
LWA-350(14")U(S)M-04		50/60	750	5500	2800	250	3235
LWA-400(16")U(S)M-04		50/60	1100	11000	2800	400	6470
LWA-450(18")U(S)M-01		50/60	1500	12500	2800	580	7353

## Drum Fan



- 100% pure copper wire motor,high efficient
- Full metal body and bracket
- 3pcs aluminum fan blades
- U type base with two wheels

### Technical Parameters

Model	Voltage (v)	Frequency (Hz)	Power (W)	Air flow (m³/min)	Speed (RPM)	Noise (dB)
LWA-600(24")U(S)M-03		50/60	260	210	1100	64
LWA-750(30")U(S)M-01	110~120 220~240	50/60	420	260	1100	68
LWA-900(36")U(S)M-01		50/60	600	290	1100	70