


Inflatable Blower

Professional HVAC Fan & Motors Manufacturer



Type Code

LW A - 370 B - 01

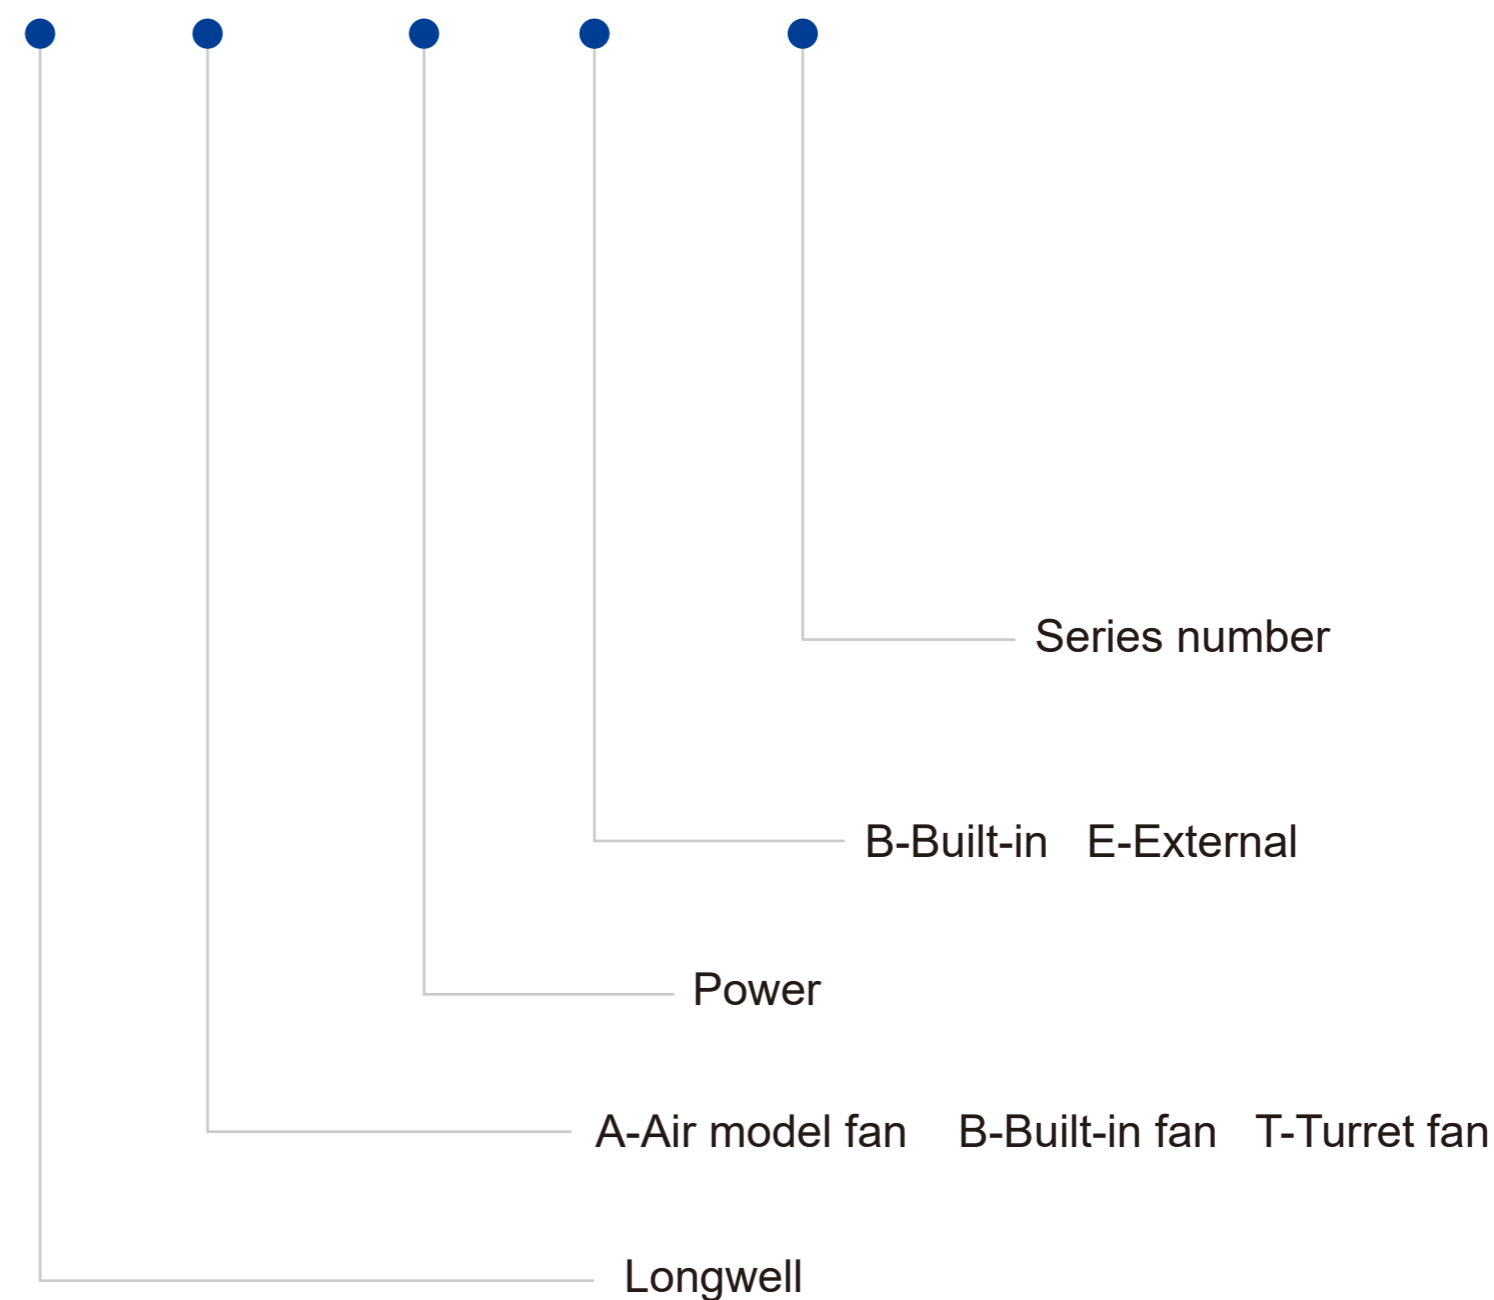

Inflatable Blower European Standard (CE Certification)

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage: bouncy castles / jumping bed / tent / and other uses.



Product Drawing




Inflatable Blower US Standard (UL/ETL Certification)

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage: bouncy castles / jumping bed / tent / and other uses.



Product Drawing

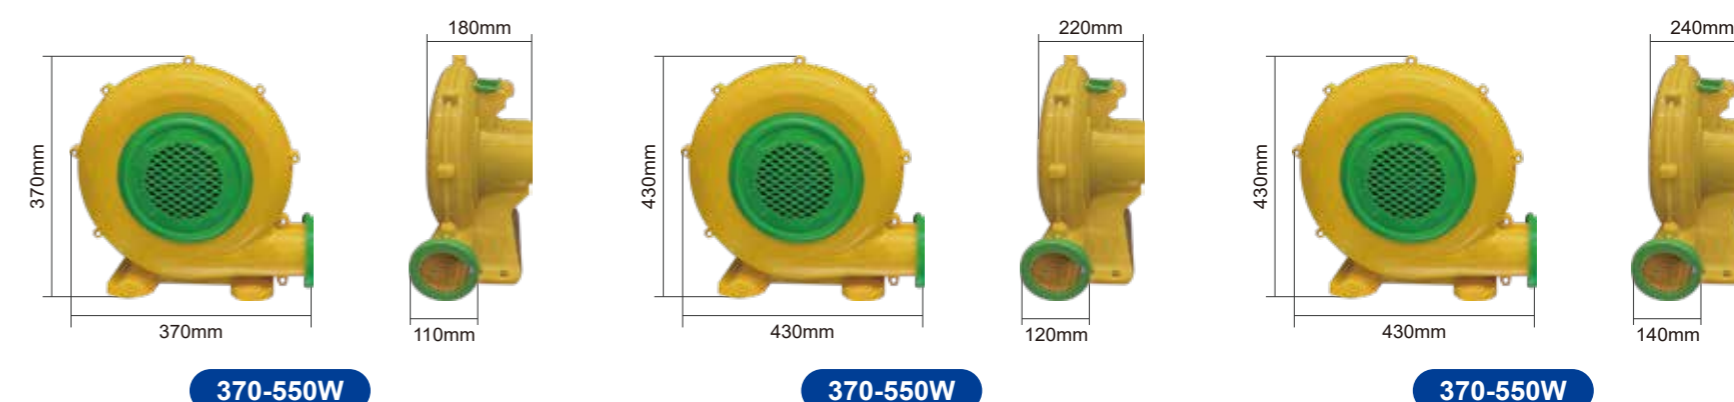

Technical Parameters

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Boosting pressure(Pa) | Air flow (m³/h) | Product size (cm) | Caliber (mm) | N.W./G.W. (Kg) | Package size (cm) |
|-------------|-------------|----------------|-----------|-----------------------|-----------------|-------------------|--------------|----------------|-------------------|
| LWA-370-01 | 230 | 50 | 370 | 1500 | 750 | 37×18×37 | 110 | 4.1 / 5.1 | 38×21×38.5 |
| LWA-550-01 | 230 | 50 | 550 | 1800 | 800 | 37×18×37 | 110 | 4.5 / 5.5 | 38×21×38.5 |
| LWA-680-01 | 230 | 50 | 680 | 1950 | 850 | 43×22×43 | 120 | 6 / 7.6 | 44×23.5×45 |
| LWA-750-01 | 230 | 50 | 750 | 2200 | 900 | 43×24×43 | 140 | 7 / 8.6 | 44×25.5×45 |
| LWA-950-01 | 230 | 50 | 950 | 2400 | 1050 | 43×24×43 | 140 | 7.2 / 8.8 | 44×25.5×45 |
| LWA-1100-01 | 230 | 50 | 1100 | 2550 | 1200 | 43×24×43 | 140 | 7.5 / 9.1 | 44×25.5×45 |

Technical Parameters

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Boosting pressure(Pa) | Air flow (m³/h) | Product size (cm) | Caliber (mm) | N.W./G.W. (Kg) | Package size (cm) |
|-------------|-------------|----------------|-----------|-----------------------|-----------------|-------------------|--------------|----------------|-------------------|
| LWA-370-02 | 120 | 60 | 370 | 1650 | 760 | 37×18×37 | 110 | 4.1 / 5.1 | 38×21×38.5 |
| LWA-480-01 | 120 | 60 | 480 | 1800 | 800 | 37×18×37 | 110 | 4.3 / 4.3 | 38×21×38.5 |
| LWA-550-02 | 120 | 60 | 550 | 1900 | 850 | 37×18×37 | 110 | 4.5 / 5.5 | 38×21×38.5 |
| LWA-680-02 | 120 | 60 | 680 | 2200 | 900 | 43×22×43 | 120 | 6 / 7.2 | 44×23.5×45 |
| LWA-750-02 | 120 | 60 | 750 | 2550 | 960 | 43×24×43 | 120 | 6.2 / 7.8 | 44×25.5×45 |
| LWA-950-02 | 120 | 60 | 950 | 2600 | 1050 | 43×24×43 | 140 | 7.1 / 8.7 | 44×25.5×45 |
| LWA-1100-02 | 120 | 60 | 1100 | 2650 | 1200 | 43×24×43 | 140 | 7.5 / 9.1 | 44×25.5×45 |

Inflatable Blower UK Standard (UKCA Certification)

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage: bouncy castles / jumping bed / tent / and other uses.



Product Drawing



Technical Parameters

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Boosting pressure(Pa) | Air flow (m³/h) | Product size (cm) | Caliber (mm) | N.W./G.W. (Kg) | Package size (cm) |
|-------------|-------------|----------------|-----------|-----------------------|-----------------|-------------------|--------------|----------------|-------------------|
| LWA-370-03 | 230 | 50 | 370 | 1500 | 750 | 37×18×37 | 110 | 4.1 / 5.1 | 38×21×38.5 |
| LWA-550-03 | 230 | 50 | 550 | 1800 | 800 | 37×18×37 | 110 | 4.5 / 5.5 | 38×21×38.5 |
| LWA-680-03 | 230 | 50 | 680 | 1950 | 850 | 43×22×43 | 120 | 6 / 7.6 | 44×23.5×45 |
| LWA-750-03 | 230 | 50 | 750 | 2200 | 900 | 43×24×43 | 140 | 7 / 8.6 | 44×25.5×45 |
| LWA-950-03 | 230 | 50 | 950 | 2400 | 1050 | 43×24×43 | 140 | 7.2 / 8.8 | 44×25.5×45 |
| LWA-1100-03 | 230 | 50 | 1100 | 2550 | 1200 | 43×24×43 | 140 | 7.5 / 9.1 | 44×25.5×45 |

Inflatable Blower Australian Standard (SSA Certification)

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage: bouncy castles / jumping bed / tent / and other uses.



Product Drawing



Technical Parameters

| Model | Voltage (V) | Frequency (Hz) | Speed (RPM) | Boosting pressure(Pa) | Air flow (m³/h) | Product size (cm) | Caliber (mm) | N.W./G.W. (Kg) | Package size (cm) | line length(cm) |
|-------------|-------------|----------------|-------------|-----------------------|-----------------|-------------------|--------------|----------------|-------------------|-----------------|
| LWA-370-04 | 220~240 | 50 | 2850 | 1500 | 760 | 37×18×37 | 110 | 4.1 / 5.1 | 38×21×38.5 | 200 |
| LWA-550-04 | 220~240 | 50 | 2850 | 1800 | 800 | 37×18×37 | 110 | 4.5 / 5.5 | 38×21×38.5 | 200 |
| LWA-680-04 | 220~240 | 50 | 2850 | 1950 | 850 | 43×22×43 | 120 | 6 / 7.6 | 44×23.5×45 | 200 |
| LWA-750-04 | 220~240 | 50 | 2850 | 2550 | 900 | 43×24×43 | 140 | 7 / 8.6 | 44×25.5×45 | 200 |
| LWA-950-04 | 220~240 | 50 | 2850 | 2600 | 1050 | 43×24×43 | 140 | 7.2 / 8.8 | 44×25.5×45 | 200 |
| LWA-1100-04 | 220~240 | 50 | 2850 | 2650 | 1200 | 43×24×43 | 140 | 7.5 / 9.1 | 44×25.5×45 | 200 |

Inflatable Blower

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage: bouncy castles / jumping bed / tent / and other uses.



Technical Parameters

| Model | Voltage (V) | Frequency (Hz) | Boosting pressure(Pa) | Air flow (m³/h) | Product size (cm) | Caliber (mm) | N.W./G.W. (Kg) | Package size (cm) | |
|-------------|-------------|----------------|-----------------------|-----------------|-------------------|--------------|----------------|-------------------|--------------------------------------|
| LWT-1125-01 | 230 | 50 | 1700 | 4100 | 49.5×30×45.3 | 180 | 17.2 / 18.2 | 54×31×51 | European Standard (CE Certification) |
| LWT-1500-01 | 230 | 50 | 1900 | 4300 | 49.5×30×45.3 | 180 | 19.2 / 20.2 | 54×31×51 | |
| LWT-2250-01 | 230 | 50 | 2200 | 4800 | 49.5×30×45.3 | 180 | 21.4 / 22.4 | 54×31×51 | |
| LWT-1125-02 | 120 | 60 | 1700 | 4100 | 49.5×30×45.3 | 180 | 17.2 / 18.2 | 54×31×51 | US Standard (UL Certification) |
| LWT-1500-02 | 120 | 60 | 1900 | 4300 | 49.5×30×45.3 | 180 | 19.2 / 20.2 | 54×31×51 | |
| LWT-2250-02 | 120 | 60 | 2200 | 4800 | 49.5×30×45.3 | 180 | 21.4 / 22.4 | 54×31×51 | |

Inflatable Blower

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage: bouncy castles / jumping bed / tent / and other uses.



Technical Parameters

| Model | Voltage (V) | Frequency (Hz) | Boosting pressure(Pa) | Air flow (m³/h) | Product size (cm) | Caliber (mm) | N.W./G.W. (Kg) | Package size (cm) | |
|-------------|-------------|----------------|-----------------------|-----------------|-------------------|--------------|----------------|-------------------|--|
| LWB-180B-01 | 230 | 50 | 800 | 600 | 24×15×25 | 90 | 2 / 2.2 | 24.5×15×25 | European Standard (CE Certification) |
| LWB-280B-01 | 230 | 50 | 1000 | 800 | 24×17×25 | 96.5 | 2.08 / 2.3 | 24.5×18.5×25 | |
| LWB-250E-01 | 230 | 50 | 900 | 700 | 31×16×31 | 90 | 2.4 / 2.8 | 33.7×21×34.2 | |
| LWB-180B-02 | 120 | 60 | 800 | 600 | 24×15×25 | 90 | 2 / 2.2 | 24.5×15×25 | US Standard (UL/ETL/FCC Certification) |
| LWB-280B-02 | 120 | 60 | 1000 | 800 | 24×17×25 | 96.5 | 2.1 / 2.3 | 24.5×18.5×25 | |
| LWB-250E-02 | 120 | 60 | 1400 | 700 | 31×16×31 | 90 | 2.5 / 3 | 33.7×21×34.2 | |
| LWB-180B-03 | 220 | 50 | 800 | 600 | 24×15×25 | 90 | 1.98 / 2.18 | 24.5×15×25 | Domestic High-end (CCC Certification) |
| LWB-280B-03 | 220 | 60 | 1000 | 800 | 24×17×25 | 96.5 | 2.08 / 2.3 | 24.5×18.5×25 | |
| LWB-250E-03 | 220 | 60 | 1000 | 700 | 31×16×31 | 90 | 2.4 / 2.8 | 33.7×21×34.2 | |